

2.3" Four-Digit Clock (Green)

DC-25G

DC-Digital™ Clocks
The True Two Wire System



Features

- Only two wires required
- Solid state
- Surface or flush mount
- Low voltage operation
- 5-year warranty
- 2.3" super bright display
- Patented clock design
- 24 or 120-Volt AC operation

Specifications

- Display Four digit; seven segment; green or red LED display
- Case Aluminum; 10.35"W x 5.50"H x 3.50"D
- Weight 2.0 pounds
- Power Source DC-25G 24VDC at 150mA
AC-25G 24VAC 60Hz at 150mA
AC-25AG 120VAC 60Hz at 60mA
- Operating Temp. 0° to 49° Celsius (32° to 120° Fahrenheit)
- Case Finish Black powder coating
- Cabling Two wires required


DC-Digital DC-25G Clock Description

The DC-Digital Clocks are designed to run and reset off two wires, as opposed to most digital clocks, which require four wires. This patented design can be used in either existing buildings or new construction. Model DC-25G is a 2.3" display, that runs off of DC power. AC-25G and the AC-25AG are 2.3" displays, that run off of AC power.


DC-Digital Clocks can be used as stand-alone non-system clocks, or can be linked via most master clocks to form a hourly and a 12-hour automatic correction system. Using DC-Digital accessories, these clocks may be adapted to existing flush-mounted back boxes.

DC-Digital DC-25G Clock Dimensions

Back View

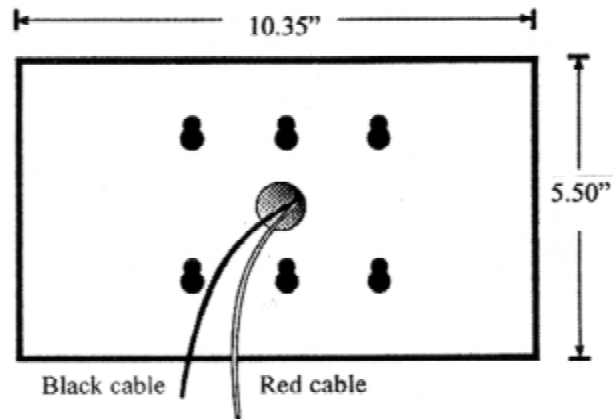

Side View

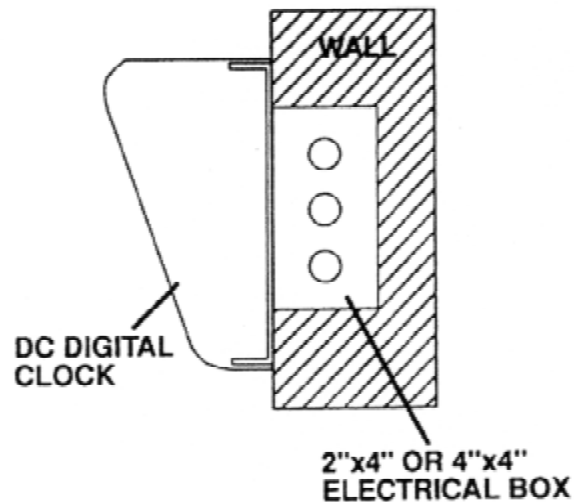

Notes

- For the DC-25G model, connect the red cable to the positive power supply lead and the black cable to the negative on the 24VDC power supply lead. If the polarity is reversed the clock will stay in the correction mode.
- For the AC-25G (24VAC) model, connect the black and red cables to the 24VAC power supply lines.
- For the AC-25AG (120VAC) model, connect the two black cables to the 120VAC supply lines.
- Industrial Electronic Service, Ltd. will not warranty any DC-Digital clock that has been connected to a power supply other than what are specified.